

DS-2CD2152F-IS

5 MP Network Dome Camera


- Up to 5 MP Resolution
- Full 1080p @ 30 fps
- 4 mm / 6 mm Fixed Lens Options
- H.264+, H.264, MJPEG
- 120 dB Wide Dynamic Range
- 3D Digital Noise Reduction
- 3-axis adjustment
- Up to 100 ft (30 m) IR Range
- MicroSD card slot supports up to 128 GB
- Audio and Alarm Inputs and Outputs
- IP67 and IK10 Protection
- 12 VDC and PoE (802.3af)



Available models:
DS-2CD2152F-IS

Hikvision's DS-2CD2152F-IS 5 MP Network Dome Camera is a versatile solution for all of your security needs. It features a powerful 5 MP lens that captures images with a resolution of 2560 × 1920 at up to 30 fps. The Network Dome Camera provides IP67 and IK10 protection, and is equipped with security-enhancing audio and alarm support.

Dimensions

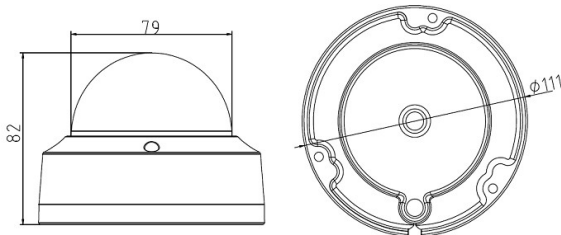

| DS-2CD2152F-IS | |
|-----------------------------|--|
| Camera | |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Minimum Illumination | 0.028 Lux @ (F2.0, AGC ON), 0 Lux with IR |
| Shutter Speed | 1/3 s to 1/100,000 s |
| Lens | 4 mm, 6 mm @ F2.0 |
| Lens Mount | M12 |
| Day and Night | IR cut filter with auto switch |
| DNR | 3D DNR |
| Wide Dynamic Range | DWDR |
| Pan and Tilt rotation | Pan: 0° to 355°, Tilt: 0° to 75°, Rotation: 0 to 355° |
| Compression Standard | |
| Video Compression | H.264 / MJPEG / H.264+ |
| H.264 Type | Main Profile |
| Video Bit Rate | 256 Kbps to 16 Mbps |
| Dual streams | Supported |
| Image | |
| Maximum Resolution | 2560 × 1920 |
| Maximum Frame Rate | 20 fps (2560 × 1920), 30 fps (2048 × 1536, 1920 × 1080, 1280 × 720) |
| Sub Stream | 30 fps (352 × 240, 640 × 480) |
| Others | Saturation, brightness, contrast adjustable by client software or web browser, Mirror, BLC, ROI, dual stream, anti-flicker, privacy mask |
| Network | |
| Network Storage | NAS (Support NFS, SMB / CIFS), ANR |
| Detection | Motion detection, tampering alarm, intrusion detection, line crossing detection |
| Alarm Trigger | HDD full, HDD error, network disconnected, IP address conflicted, illegal login |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| General Function | One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access |
| Standard | ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI |
| Interface | |
| Communication Interface | 1 RJ45 10M/100M Ethernet port |
| On-board storage | Built-in microSD/SDHC/SDXC slot, up to 128 GB |
| Alarm interface | 1x alarm I/O; |
| Audio interface | 1x audio I/O; |
| Reset | Yes |
| General | |
| Operating Conditions | -22° F to 140° F (-30° C to 60° C), Humidity 95% or less (non-condensing) |
| Power Supply | 12 VDC ± 25%, PoE (802.3af) |
| Power Consumption | Maximum 5 W |
| IR Range | 100 ft (30 m) |
| Protection Level | IP67, IK10 |
| Dimensions | Φ 4.4" × 3.2" (111 mm × 82 mm) |
| Weight | 1.1 lbs (500 g) |

Accessories

| | | | | | |
|---|---|---|--|---|---|
|  |  |  |  |  |  |
| Angled base AB110 | Wall mount WM110 | Pendant cap PC110 | Conduit base CB110 | Sun and rain shield SRS | Sun and rain shield medium SRSM |