

NVR-P32-4/16A

Network Video Recorder



قابلیت های کلیدی

- پشتیبانی از 4 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- خروجی 12 ولت
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 32 کانال تصویر ورودی تا رزولوشن 12 مگاپیکسل
- دارای 16 پورت POE با توان کلی 200 وات
- پشتیبانی از دوربین های با قابلیت ONVIF
- دو عدد HDMI و یک عدد VGA

Specifications

IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	HDMI1 /VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/60Hz, 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz 1600x1200/60Hz,
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Decoding format	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x .1080p@30, 32 x 960p@25

SATA	4 SATA interfaces
Capacity	up to 10TB for each HDD
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet interface
Serial Interface	1 x RS485
USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
Power Output	12 VDC
Interface	16 independent 100 Mbps PoE network interfaces 1-ch, RCA
Max Power	Max 30W for single port Max 200W in total (12.5W for each)
Supported Standard	IEEE 802.3at
Power Supply	100-240 VAC Power Consumption: ≤ 20 W (without HDD)
Working Environment	-10°C - + 55°C (+14°F - +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W-D-H)	442 mm × 425 mm × 89 mm (17.4" × 16.7" × 3.5")
Weight (without HDD)	≤ 5.24 Kg(11.55lb)

Dimensions

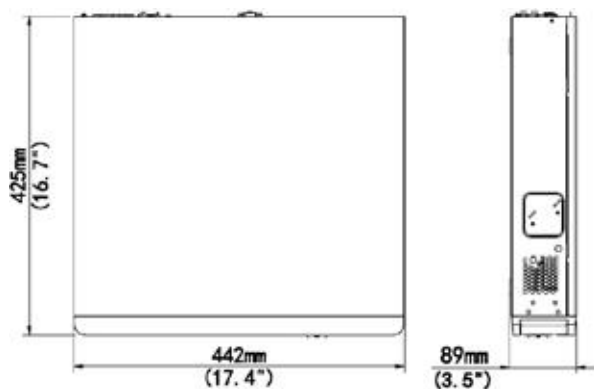

Rear Panel

